



Sunweave

Balanced Weave



The Sunweave woven collection merges the time-honored craft of woven construction with today's desire for artisanal materials in the built environment. Balanced Weave is inspired by sisals and classic pin dots directly influenced from nature, where grass cloth and other natural fibers were used to create mats and rugs. With the addition of a subtle accent pin dot, this sisal becomes most tailored, perfect for interiors that desire a clean ground of essential texture.





Balanced Weave 969 Black Bean





Woven Construction

Woven construction is the oldest method of producing textiles. In the weaving process, pile yarns are intricately interlaced into the foundation, creating a structure whereby backing and face yarns become one. The art of weaving also allows for a face construction that is denser than that of tufted carpet, with the result being a carpet that retains its original appearance over time. Time has proven that woven carpets outperform any other carpet construction.

PERFORMANCE

- Interlaced components eliminate ability to zipper
- Inherent stability—no secondary backing
- Greater appearance retention and resiliency
- Built-in cushion properties
- Denser face construction
- Woven construction extends the life of carpet three times longer than tufted
- Permanent Stain and Soil protection with Duracolor Tricor fiber

SUSTAINABILITY


- Living Product Challenge Petal Certified – this product has a net positive carbon impact through handprinting
- Extending the life of carpet = less carpet to the landfill
- Declared Red List Free
- CRI Green Label Plus Certified
- Recyclable through Mohawk's ReCover Program
- May contribute to or comply with LEEDv4, Living Building Challenge and WELL Building Standard

INSTALLATION

- Superior construction offers reliability for the life of your installation

SERVICE

- Quality and experience combine to offer a unique construction not available through all manufacturers

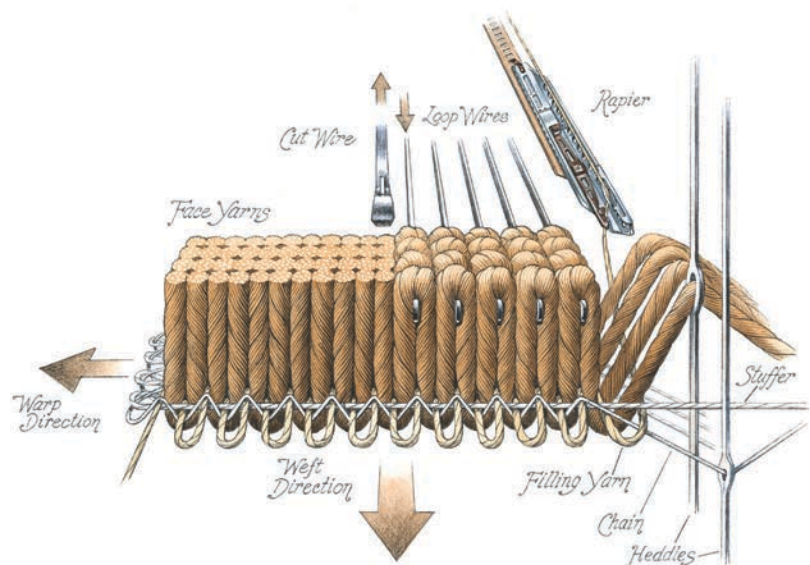

Specifications

Balanced Weave KC275

DESIGN

Size	12' width (3.66m)
Surface Appearance	Multi-Colored Loop
Fiber Type	Duracolor® Tricor Premium Nylon
Dye Method	Solution Dyed
Pattern Repeat	0.5" (W) x .25" (L)
Colors Available	5

PERFORMANCE

Construction	Woven
Stain Release Technology	Permanent, Built into the Fiber
GSA Stain Release Rating	Passes
Soil Release Technology	EcoSentry Soil Protection
Flammability	ASTM E 648 - Class 1 (Glue Down)
Smoke Density	ASTM E 662 - Less than 450
Static Propensity	AATCC - 134 Under 3.5 KV

SUSTAINABILITY

Certification	Living Product Challenge Petal Certified; Declared Red List Free
Indoor Air Quality	Green Label Plus Certified #3802
NSF 140	Gold

SERVICE

Warranties	Lifetime Limited Woven Wear Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static
------------	--

Mohawk Group warrants its adhesives for the life of the original installation only when a Mohawk Group style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Group adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Duracolor by Mohawk Stain Resistant System passes AATCC Test Method 175 combined with pre-abrasion meeting GSA requirements for stain resistance. Under GSA requirements stain resistant carpets must score no less than 8.0 (10.0 is best) on the AATCC Red 40 Stain Scale. Carpet samples must first be exposed to 100 revolutions of the

Taber abrader (1,000-gram weight per H-18 wheel) and then the abraded area must be stain tested using AATCC tested using AATCC test method 175.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com

reco^{ver}
carpet recycling program
877-3RE-CYCL



Produced with recycled materials



Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

KC275 8PG BROCHR LT