Mohawk Group


Lineate

Overview

Feature	Description
Collection	Hot and Heavy
Style	Lineate (C0089)
Product Type	LVT
Size	9" X 59"
Construction	Commercial LVT
Gauge	5 mm
Total Thickness	5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force [™] Ultra
Surface Profile	Embossed
Edge Profile	Squared
Installation	Glue Down, Loose Lay
Installation Method	Brick Ashlar, Half Lap, Herringbone,
	Random
Recommended Adhesive	M95.0, M99, MS160, M700 Plus, or Total
	Bond Adhesive



Recommended Installation Methods

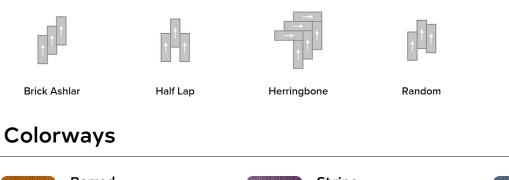

Barred		Stripe		Strake	
Color code: Style number:	232 C0089	Color code: Style number:	444 C0089	Color code: Style number:	565 C0089
Ridged		Variegated		Lines	

in

P

Mohawk Group

Colorways

Parallel		Marker		Groove	
Color code: Style number:	741 C0089	Color code: Style number:	857 C0089	Color code: Style number:	868 C0089
Figured		Cord		Striated	
Color code: Style number:	948 C0089	Color code: Style number:	957 C0089	Color code: Style number:	988 C0089

Testing

Feature	Description
Classification	(ASTM F1700) Class III, Type B, Embossed
Squareness	(ASTM F2421) ±0.10 in
Size and Tolerance	(ASTM F2421) ±0.016 in
Thickness	(ASTM F386) ± .005 in
Flexibility	(ASTM F137) Passes
Dimensional Stability	(ASTM F2199) Passes
Static Load Limit	(ASTM F970) 1000 psi
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	(ASTM F925) Passes
Resistance to Light	(ASTM F1515) Passes
Resistance to Heat	(ASTM F1514) Passes
Radiant Flux	(ASTM E648) Class 1
Smoke Density	(ASTM E662) 450
Wear Layer Thickness	20 mil (0.5 mm)
Lightfastness	(ASTM F1515) Passes

Sustainability

Description
11.9 kg CO2e/sq m2
-12.5 kg CO2e/sq m2
-0.595
EPD Vinyl Tile
Free of Orthophthalates and Heavy Metals
Calculate LEED on Ecomedes
Participates in Mindful Materials Library
Achiever
South Korea

y

Mohawk Group

Packaging

Feature	Description
Pieces per Carton	6
Weight per Piece	6.31
Cartons Per Pallet	64
Square Feet per Carton	22.84
Weight per Carton	37.86

Warranties

Limited 20 Year M-Force Ultra Commercial Warranty

5