


#### Ceo II 12'

#### Overview


Feature	Description
Collection	Pure Genius II
Style	Ceo II 12' (BC382)
Product Type	Broadloom
Size	12Ft 00In
Pattern Repeat	0.8"W X 0"L
Construction	Tufted
Surface Appearance	Textured Multi Colored Loop
Fiber	ColorStrand® Nylon
Dye Method	Solution Dyed / Yarn Dyed
Stain Release Technology	EcoSentry Plus Stain Protection
Soil Release Technology	EcoSentry Soil Protection
Backing	Weldlok®
Pile Weight	15.00 oz/yd2 (509 g/m2)
Gauge	1/10 (39.37 rows per 10 cm)
Stitches per Inch	10 (39.37 per 10cm)
Total Thickness	0.239" (6.07 mm)
Density	5347
Installation	Glue Down, Double Stick, Tackless
Installation Method	Side Match
Recommended Adhesive	NuBroadlok Premium Plus, NuBroadlok
	VRT, NuBroadlok Edge Sealer, NuBroadlok

Moisture Proof Latex Seam Sealer

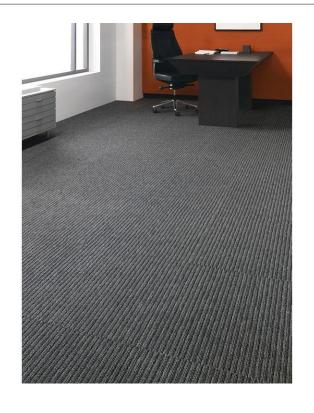

### Colorways

















# **Testing**

Feature	Description
TARR Rating	Heavy
Flammability	(ASTM E648) Class 1 - Glue Down
Static Propensity	(AATC 134) Under 3.5 KV
Smoke Density	(ASTM E662) Less than 450

# Sustainability

Feature	Description
Embodied Carbon	17.5 kg CO2e/sq m2
Carbon Handprint	-18.375 kg CO2e/sq m2
Beyond Carbon Neutral	-0.875
Total Recycled Content	27%
Pre-Consumer Recycled Content	27%
EPD	Weldlok EPD
HPD	Weldlok HPD
Material Health	Declare Red List Free
NSF 140	Weldlok - NSF 140 Gold
LEED	Calculate LEED on Ecomedes
Indoor Air Quality	GLP 8216
Mindful Materials	Participates
MindClick Rating	Leader
End of Life	ReCover
Country Of Origin	USA

### Warranties

Lifetime Limited Wear Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static







