



# Umpteen

## Overview


| Feature                  | Description                                      |
|--------------------------|--|
| Collection               | SwitchCode                                       |
| Style                    | Umpteen (BT594)                                  |
| Product Type             | Carpet Tile                                      |
| Size                     | 24 in x 24 in                                    |
| Construction             | Tufted   |
| Surface Appearance       | Textured Patterned Loop                          |
| Fiber                    | ColorStrand® Nylon                               |
| Dye Method               | Solution Dyed                                    |
| Stain Release Technology | EcoSentry Plus Stain Protection                  |
| Soil Release Technology  | EcoSentry Soil Protection                        |
| Backing                  | Ecoflex Matrix                                   |
| Pile Weight              | 18 oz/yd <sup>2</sup> (610 g/m <sup>2</sup> )    |
| Gauge                    | 1/12 (47.00 rows per 10cm)                       |
| Stitches per Inch        | 13 (51.2 per 10cm)                               |
| Pile Thickness           | 0.128  |
| Installation             | FlexLok  |
| Installation Method      | Quarter Turn, Vertical Ashlar, Multi Directional |
| Recommended Adhesive     | Enpress, M700 Plus, FlexLok+ Tabs, Total Bond    |

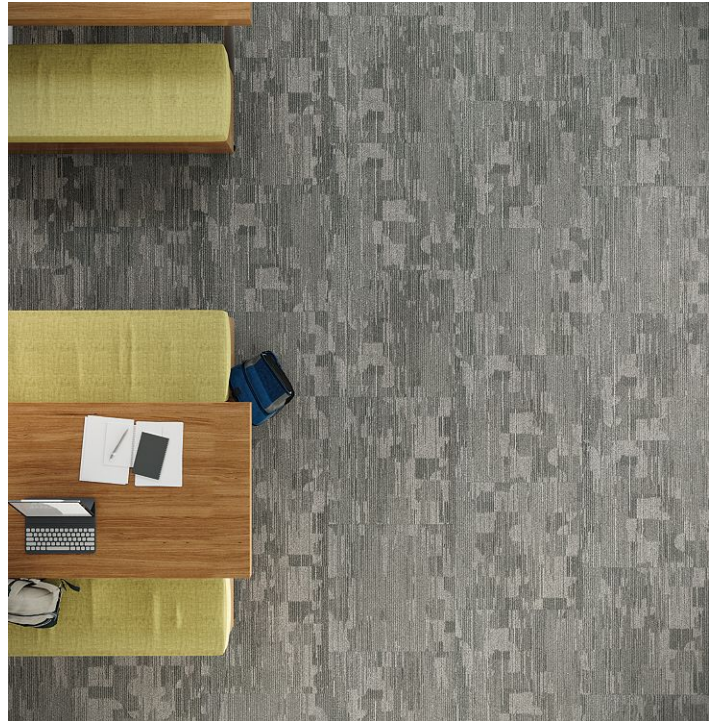


## Recommended Installation Methods



Quarter Turn



Vertical Ashlar



Multi Directional

## Colorways



### Charlie

Color code: 937  
Style number: BT594



### Bravo

Color code: 949  
Style number: BT594



### Alpha

Color code: 979  
Style number: BT594



### Echo

Color code: 545  
Style number: BT594



### Delta

Color code: 848  
Style number: BT594

## Testing

| Feature           | Description                     |
|-------------------|---------------------------------|
| TARR Rating       | Heavy                           |
| Flammability      | (ASTM E648) Class 1 - Glue Down |
| Static Propensity | (AATC 134) Under 3.5 KV         |
| Smoke Density     | (ASTM E662) Less than 450       |

## Sustainability

| Feature                | Description                                   |
|------------------------|---|
| Embodied Carbon        | 7.71 kg CO2e/sq m2                            |
| Carbon Handprint       | -8.10 kg CO2e/sq m2                           |
| Beyond Carbon Neutral  | -0.39   |
| Total Recycled Content | 45%   |
| EPD                    | EcoFlex Matrix EPD                            |
| HPD                    | EcoFlex Matrix HPD                            |
| Material Health        | Declare Red List Free                         |
| NSF 140                | <a href="#">EcoFlex Matrix - NSF 140 Gold</a> |
| LEED                   | <a href="#">Calculate LEED on Ecomedes</a>    |
| Indoor Air Quality     | GLP 1171                                      |
| Mindful Materials      | Participates                                  |
| MindClick Rating       | Achiever                                      |
| End of Life            | ReCover                                       |
| Country Of Origin      | USA   |

## Packaging

| Feature                 | Description |
|-------------------------|-------------|
| Square Yards Per Carton | 10.67       |
| Pieces per Carton       | 24          |
| Cartons Per Pallet      | 22          |
| Weight Per Carton       | 39.420      |
| Weight per Piece        | 1.6425      |

## Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static