



Umpteen

Overview


Feature	Description
Collection	SwitchCode
Style	Umpteen (BT594)
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Surface Appearance	Textured Patterned Loop
Fiber	ColorStrand® Nylon
Dye Method	Solution Dyed
Stain Release Technology	EcoSentry Plus Stain Protection
Soil Release Technology	EcoSentry Soil Protection
Backing	Ecoflex Matrix
Pile Weight	18.00 oz/yd2 (610 g/m2)
Gauge	1/12 (47.00 rows per 10cm)
Stitches per Inch	13 (51.18 per 10cm)
Total Thickness	0.230" (5.84 mm)
Density	5062
Installation	FlexLok
Installation Method	Quarter Turn, Vertical Ashlar, Multi-Directional
Recommended Adhesive	Enpress, M700 Plus, FlexLok+ Tabs, Total Bond

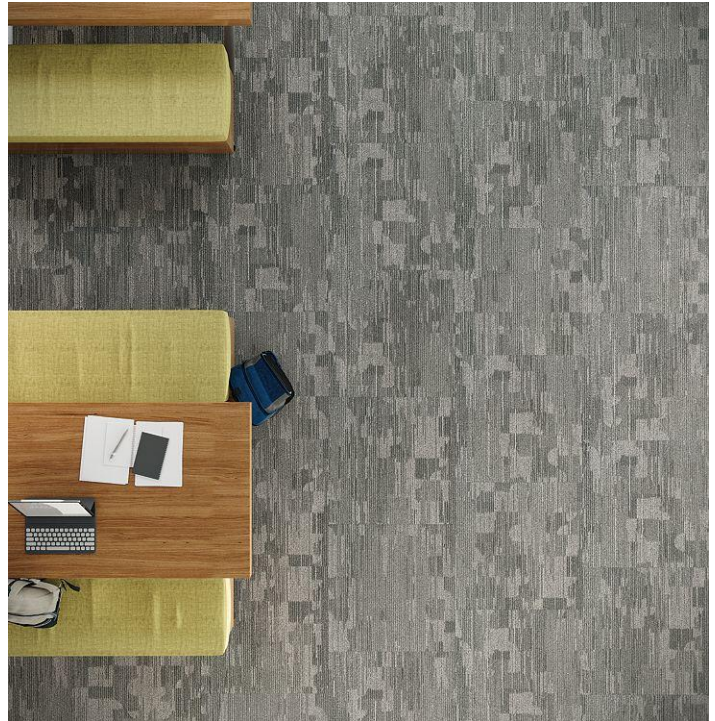


Recommended Installation Methods



Quarter Turn



Vertical Ashlar



Multi-Directional

Colorways



Echo

Color code: 545
Style number: BT594



Delta

Color code: 848
Style number: BT594



Charlie

Color code: 937
Style number: BT594



Bravo

Color code: 949
Style number: BT594



Alpha

Color code: 979
Style number: BT594

Testing

Feature	Description
TARR Rating	Heavy
Flammability	(ASTM E648) Class 1 - Glue Down
Static Propensity	(AATC 134) Under 3.5 KV
Smoke Density	(ASTM E662) Less than 450

Sustainability

Feature	Description
Embodied Carbon	7.71 kg CO2e/sq m2
Carbon Handprint	-8.10 kg CO2e/sq m2
Beyond Carbon Neutral	-0.39
Total Recycled Content	45%
EPD	EcoFlex Matrix EPD
HPD	HPD 2.1 EcoFlex Matrix - 1000 ppm
Material Health	Declare Red List Free
NSF 140	EcoFlex Matrix - NSF 140 Gold
LEED	Calculate LEED on Ecomedes
Indoor Air Quality	GLP 1171
Mindful Materials	Participates in Mindful Materials Library
MindClick Rating	Achiever
Country Of Origin	USA

Packaging

Feature	Description
Square Yards Per Carton	10.67
Cartons Per Pallet	22
Weight Per Carton	39.36

Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Limited Stain Warranty, Lifetime Static