


Connetic

Overview

Feature	Description
Collection	Connetic
Style	Connetic (BC426)
Product Type	Broadloom
Size	12Ft 00In
Pattern Repeat	NONE
Construction	Tufted
Surface Appearance	Textured Patterned Loop
Fiber	ColorStrand® Nylon
Dye Method	Solution Dyed
Stain Release Technology	EcoSentry Plus Stain Protection
Soil Release Technology	EcoSentry Soil Protection
Backing	Unibond® Plus
Pile Weight	28.00 oz/yd2 (949 g/m2)
Gauge	1/12 (47.00 rows per 10 cm)
Stitches per Inch	11 (43.31 per 10cm)
Pile Thickness	.139" (3.53 mm)
Total Thickness	0.331" (8.41 mm)
Density	7251
Installation	Glue Down, Double Stick, Tackless
Installation Method	Side Match
Recommended Adhesive	NuBroadlok Premium Plus, NuBroadlok VRT, NuBroadlok Edge Sealer, NuBroadlok Moisture Proof Latex Seam Sealer

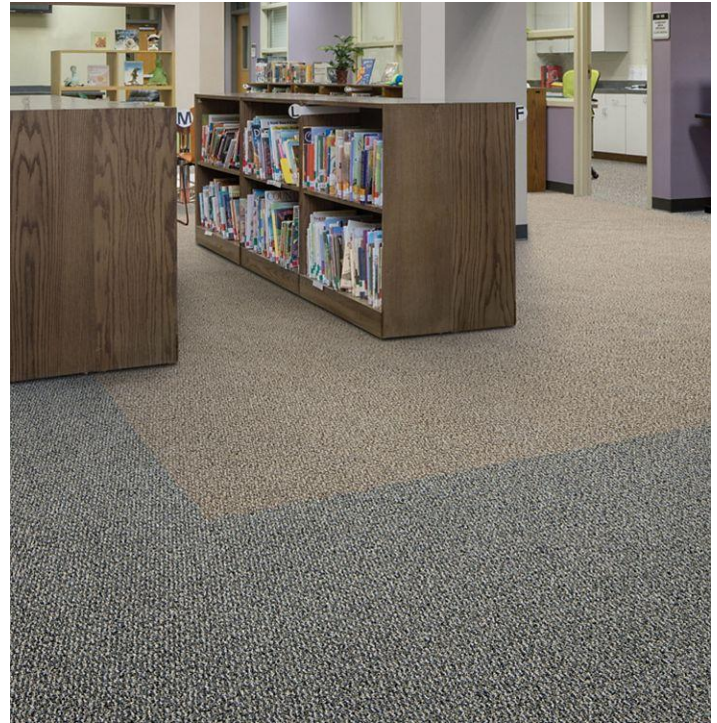

Colorways



Intuitive

Color code: 589
Style number: BC426



Perceptive

Color code: 689
Style number: BC426



Conscious

Color code: 719
Style number: BC426



Observant

Color code: 837
Style number: BC426



Instinctive

Color code: 879
Style number: BC426



Reasoning

Color code: 928
Style number: BC426



Spontaneous

Color code: 965
Style number: BC426



Visceral

Color code: 978
Style number: BC426



Conceptual

Color code: 989
Style number: BC426

Testing

Feature	Description
TARR Rating	Heavy
Flammability	(ASTM E648) Class 1 - Glue Down
Static Propensity	(AATC 134) Under 3.5 KV
Smoke Density	(ASTM E662) Less than 450

Sustainability

Feature	Description
Embodied Carbon	14.9 kg CO2e/sq m2
Carbon Handprint	-15.645 kg CO2e/sq m2
Beyond Carbon Neutral	-0.745
Total Recycled Content	31%
Pre-Consumer Recycled Content	31%
EPD	Unibond Plus EPD
HPD	Unibond Plus HPD
Material Health	Declare Red List Free
NSF 140	Unibond Plus - NSF 140 Gold
LEED	Calculate LEED on Ecomedes
Indoor Air Quality	GLP 3802
Mindful Materials	Participates
MindClick Rating	Leader
End of Life	ReCover
Country Of Origin	USA

Warranties

Lifetime Limited Unibond® Plus Warranty, Lifetime Duracolor Stain Warranty, Lifetime Static